
PRO-GRIP MAX™ 150A

AIR COOLED MIG TORCH
180A CO_2 150A Mixed Gas @ 60% Duty Cycle,
EN60974-7, 0.6mm-0.9mm (.023"-.040") Wires



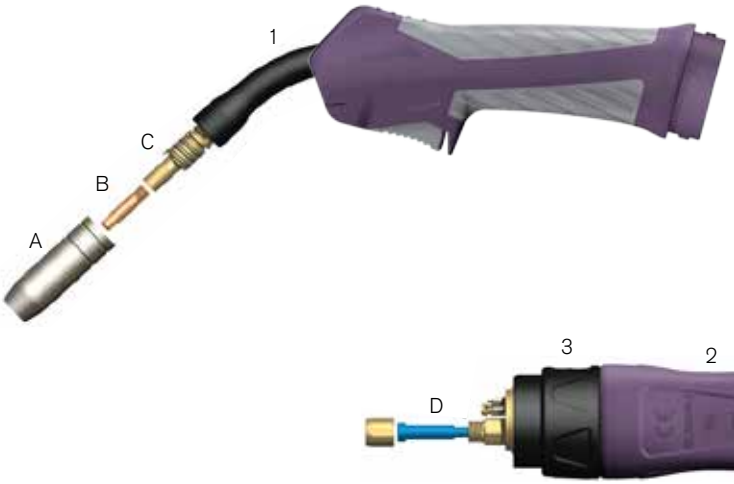

STOCK CODE	DESCRIPTION
PRO1500-30ER	Torch c/w Euro Fitting x 3m
PRO1500-40ER	Torch c/w Euro Fitting x 4m
PRO1500-50ER	Torch c/w Euro Fitting x 5m

	STOCK CODE	DESCRIPTION
1	B1501	Swan Neck c/w Tip Adaptor, Spring, Sleeve
2	B1518	Gun Plug Housing c/w Nut
3	B1519PL	Gun Plug Nut-Plastic c/w Insert


D

Liners
See page 114 for full range


STOCK CODE	DESCRIPTION
B1535-30*	Steel 0.6-0.9mm (.023-.035") x 3m
B1535-40*	Steel 0.6-0.9mm (.023-.035") x 4m
B1535-50*	Steel 0.6-0.9mm (.023-.035") x 5m
B2524-30*	Steel 1.0-1.2mm (.040-.045") x 3m
B2524-40*	Steel 1.0-1.2mm (.040-.045") x 4m
B2524-50*	Steel 1.0-1.2mm (.040-.045") x 5m
B1536-30	Teflon 0.6-0.9mm (.023-.035") x 3m
B1536-40	Teflon 0.6-0.9mm (.023-.035") x 4m
B1536-50	Teflon 0.6-0.9mm (.023-.035") x 5m

Nozzles


A

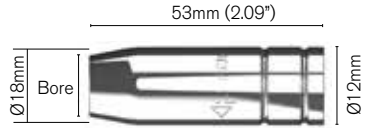

STOCK CODE	STYLE	BORE
B1529	Cylindrical	16mm (5/8")
B1530*	Conical	12mm (15/32")
B1531	Tapered	11mm (7/16")

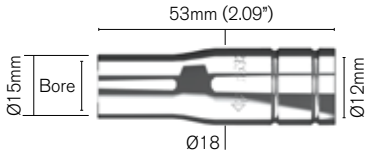


B1532	Bottle	13mm (1/2")

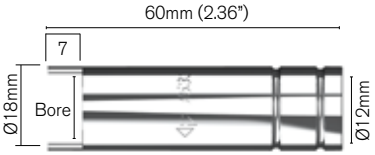

B1533	Spot	16mm (5/8")

Contact Tips

B



STOCK CODE	WIRE SIZE	MATERIAL
B1527-06	0.6mm (.023")	ECu
B1527-08*	0.8mm (.030")	ECu
B1527-09	0.9mm (.035")	ECu

Tip Adaptor

C



STOCK CODE	TIP THREAD
B1507 L/H	M6

*** Denotes standard build**

ROLL MARKING

All Parweld consumables are roll marked to enable you to identify genuine Parweld product.