
ACCESSORIES AND SPECIAL PARTS **TIG**

ABITIG ® GRIP LITTLE SL 9 ■ ABITIG ® GRIP LITTLE SL 17 / 26
ABITIG ® GRIP LITTLE SL 18 / 20

- Available in gas and liquid cooled versions
- Particularly suitable for components that are difficult to access, e. g. for pipe welding
- 360° rotatable
- Torch head can be replaced



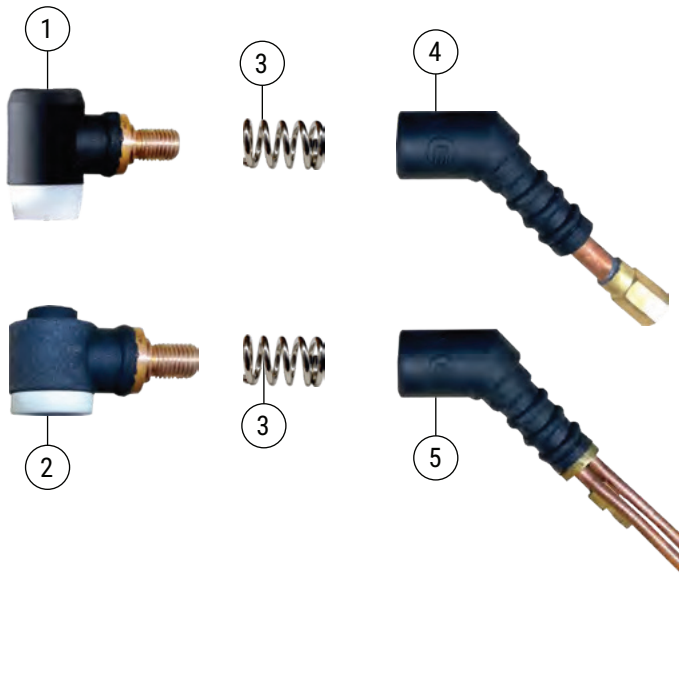

ABITIG ® GRIP Little SL 9
Rating: 110 A DC
80 A AC
Duty cycle: 35 %
Tungsten electrodes Ø: 0.5–1.6 mm

ABITIG ® GRIP Little SL 17/26
Rating: 150 A DC
105 A AC
Duty cycle: 35 %
Tungsten electrodes Ø: 0.5–4.0 mm

ABITIG ® GRIP Litle SL 18/20
Rating: 180 A DC
130 A AC
Duty cycle: 100 %
Tungsten electrodes Ø: 0.5–3.0 mm

80 – 180 A

Pos.	Description	Cooling	Version	Pcs.	Part-No.
1	Torch head ABITIG® SL 9/17/26	gas cooled	SL	2	705.1787.2
2	Torch head ABITIG® SL 18/20	liquid cooled	SL	2	705.1786.2
3	Spring	–	–	10	705.1788.10
4	Torch body ABITIG® GRIP Little SL*	gas cooled	SL	2	705.1789.2
5	Torch body ABITIG® GRIP Little SL*	liquid cooled	SL	2	705.1790.2

* Can also be used in combination with adapter socket 712.7026 in handle ABITIG GRIP® 180.0130.1.
Technical data according to EN 60 974-7
Due to the different connection variants on the machine side, it is not possible to list part numbers for complete torches. Please contact our sales department.